

Deutsche
Qualität
Garantiert



ECLIPSE
ULTRA BLACK
series

For Elegant Living

30

years

Performance
Guarantee

15

years


Product
Warranty

MONO-CRYSTALLINE PV MODULES
SHINGLED TECHNOLOGY • MONO-FACIAL

395W-405W
AE BMC-60E Series



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored



www.ae-solar.com

Mechanical and design specification


Cell type	Mono c-Si PERC, Shingled cells, 166 mm
No. of cells	340
Glass	3,2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White-black Backsheet
Junction box	IP 68 rated
Frame	30 mm anodized Aluminium alloy, full black
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1719 mm x 1140 mm x 30 mm
Weight	21 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m ²
Mechanical load	5400 Pa/ 550 kg/ m ²

Packaging information

Packaging configuration	72 pcs / pallet
Loading capacity	936 pcs / 40 HQ
Size / Pallet	1750 mm x 1140 mm x 2490 mm
Weight	1612 kg / double pallets

Temperature ratings


Operating temperature	(°C)	-40 to +85
Temp.coefficient of P_{max}	(%/°C)	-0.34
Temp.coefficient of V_{oc}	(%/°C)	-0.27
Temp.coefficient of I_{sc}	(%/°C)	0.040
Nom. operating temp. NOCT	(°C)	42.3 ± 2

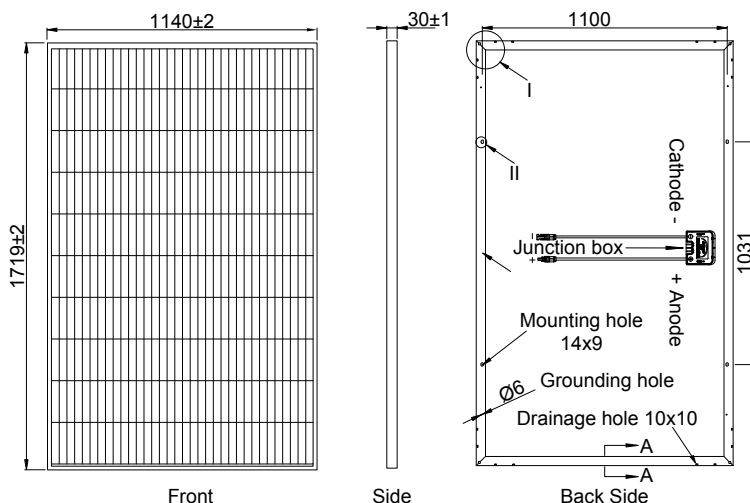


Front

Side


Back Side





Drainage hole I



Mounting hole II



Section A-A

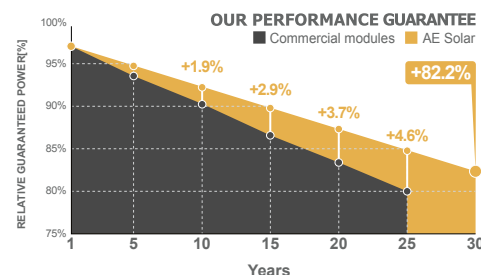

Electrical specifications (STC*):		AE395BMC-60E	AE400BMC-60E	AE405BMC-60E
Nominal Max. Power	P_{max} (Wp)	395	400	405
Maximum operating voltage	V_{MPP} (V)	38.50	38.60	38.70
Maximum operating current	I_{MPP} (A)	10.26	10.36	10.47
Open-circuit voltage	V_{oc} (V)	46.30	46.40	46.50
Short-circuit current	I_{sc} (A)	10.92	10.97	11.02
Module efficiency	η (%)	20.20	20.40	20.70
Power tolerance	(W)		0~+5	
Maximum system Voltage	(V)		1500	
Maximum series fuse rating	(A)		20	

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):		AE395BMC-60E	AE400BMC-60E	AE405BMC-60E
Nominal Max. Power	P_{max} (Wp)	297	301	305
Maximum operating voltage	V_{MPP} (V)	36.70	36.80	36.90
Maximum operating current	I_{MPP} (A)	8.10	8.18	8.27
Open-circuit voltage	V_{oc} (V)	44.10	44.20	44.30
Short-circuit current	I_{sc} (A)	8.10	8.18	8.27

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices.
The specifications included in the datasheet are subject to change without prior notice.

